


# COMPACTADORES PATA DE CABRA PADDED VIBRATORY ROLLER



RP 1250 | 1550 | 1850

**PowerAttachments®**



Expertos en implementos  
Attachments experts



### APLICACIONES

Compactador vibratorio con tambor pata de cabra de alto rendimiento y gran potencia, especialmente indicado para la compactación de terrenos arcillosos o muy duros y para el compactado de rellenos, etc. en la manutención de caminos y carreteras.

### CARACTERÍSTICAS TÉCNICAS

- Compactador vibrante con tambor liso.
- Bidireccional con transmisión directa del motor mediante acoplamiento elástico al eje.
- 12 silent-block para absorber las vibraciones.
- Rascador ajustable para el rodillo pata de cabra.
- Acoplamiento oscilante en  $\pm 15^\circ$  y desplazado.
- Conexiones hidráulicas para minicargadora. A+B.
- Enganche universal tipo minicargadora SSL.

### APPLICATIONS

High performance and powerful vibratory roller with sheep foot drum, specially suited to work in heavy soils, clay, and clay-based backfill compaction in the road, path & forest track maintenance, etc.

### FEATURES

- Vibratory roller with smooth drum.
- Bidirectional with direct transmission of the motor through elastic connection to the shaft.
- 12 silent-block to absorb vibrations.
- Adjustable scraper for the padfoot drum.
- $\pm 15^\circ$  oscillating and shifted attach frame.
- Hydraulic connections for skid steer loader. A+B.
- Universal attach frame type skid steer loader.

MODELO (referencia)	ANCHO TAMBOR (mm)	ANCHO TOTAL (mm)	DIÁMETRO (mm)	POTENCIA (kg)	FRECUENCIA (rpm)	PESO (kg)
RP - 1250	1250	1520	610	2600	2000 ~ 3000	785
RP - 1550	1550	1820	610	3200	2000 ~ 3000	910
RP - 1850	1850	2120	610	3800	2000 ~ 3000	1030
MODEL (reference)	DRUM WIDTH (mm)	TOTAL WIDTH (mm)	DIAMETER (mm)	POWER (Ton)	FREQUENCY (lts)	WEIGHT (kg)

### EQUIPOS OPCIONALES / OPTIONAL EQUIPMENT

#### Sistema de riego


Sistema de riego de 125 litros, provisto de bomba de 12v., lanza con aspersores y soporte de sujeción, para refrigerar el tambor y evitar el polvo.



Water system with 125l. water tank, 12v. pump, sprinklers and support frame, highly recommended for cooling the drum and avoid the dust.

#### Hoja dozer

Hoja dozer ajustable en altura para esparcir materiales y compactarlos al mismo tiempo.

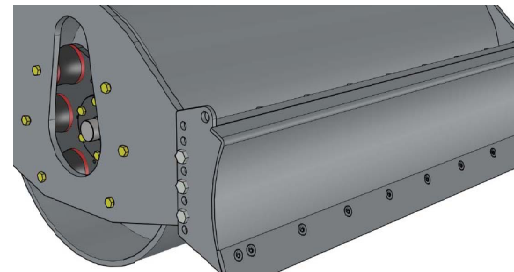

Height-adjustable dozer blade to spread materials and compact them at the same time

#### Irrigation set

#### Dozer blade

MODELOS / MODELS	RP 1250	RP 1550	RP 1850
A Largo total (mm) / Total length (mm)	950	950	950
B Alto total (mm) / Total height (mm)	680	680	680
C Diámetro tambor (mm) / Drum diameter (mm)	610	610	610
D Ancho tambor (mm) / Drum width (mm)	1250	1550	1850
E Ancho total (mm) / Total width (mm)	1488	1788	2088
• Oscilación tambor (°) / Drum tilt (°)	$\pm 15$	$\pm 15$	$\pm 15$
• Frecuencia (rpm) / Frequency (rpm)	2000 ~ 3000	2000 ~ 3000	2000 ~ 3000
• Potencia (kg) / Power (kg)	2600	3200	3800
• Caudal recomendado (lpm) / Recommended flow (lpm)	38 ~ 68	38 ~ 68	38 ~ 68
• Presión trabajo (bar) / Work pressure (bar)	172 ~ 207	172 ~ 207	172 ~ 207
• Peso (kg) / Weight (kg)	785	910	1030

